



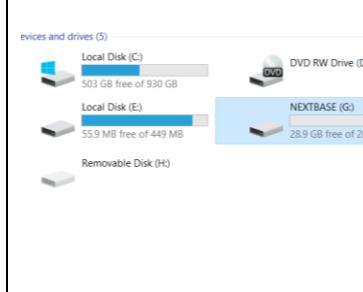
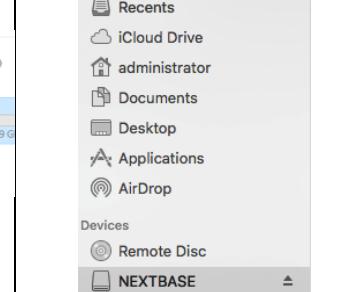
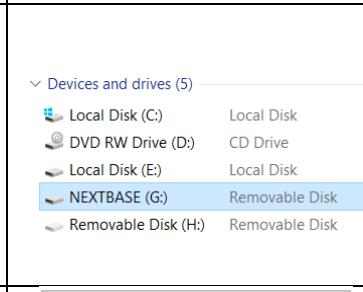
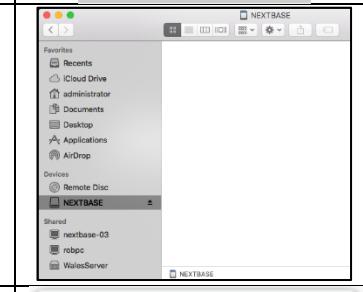
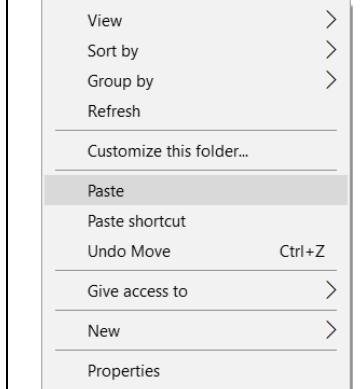
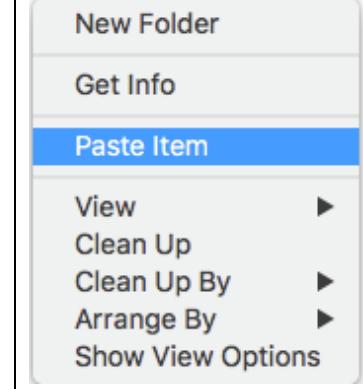


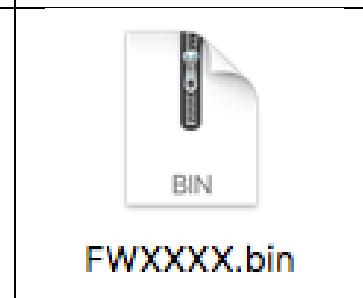


Firmware Update Instructions (NBDVR222)

Please note: The following upgrade instructions are in relation to updating the firmware by copying an update file to the SD card via the supplied USB cable. The NBDVR222 model can also be updated via [My Nextbase Player](#) by using the 'Update Dashcam' button.

	Windows	Mac
1. Download the latest version of firmware for the NBDVR222 via the Support & Downloads page for your camera.	Download here	Download here
2. The firmware update will be saved to your PC as a file called 'FW222A.bin' and can be located within the downloads folder on your computer. NOTE: You won't be able to open this file on your PC.	 FWXXXX.bin	 FWXXXX.bin
3. Right click (CTRL + click if using a mac) on the bin (FW222A.bin) file inside the downloads folder and select the option that says 'Copy'		
4. Go into the camera's setup menu (press the menu button twice when the camera is not recording) and select the option that says 'Format SD Card' using the 'OK' button to confirm the option.		

<p>5. Plug the camera into your PC using the supplied USB cable and use the 'OK' button to select the option that says 'Firmware Update'.</p>		
<p>6. The camera should appear as a storage device called 'NEXTBASE' within File Explorer (Windows) or Finder (Mac).</p>		
<p>7. Click on your SD card as it appears within File Explorer/ Finder to view inside the card.</p>		
<p>8. Once inside the card, simply right click in the white space and select the option that says 'Paste'. This will copy the file from your downloads folder and place it onto the SD card where it can be read by the camera.</p>		
<p>9. Please ensure that the bin file is not renamed in anyway, the update will fail if the file appears as FW222A(1).bin for example.</p>		
<p>10. Once you have copied 'FW222A.bin' over to the SD card you can now unplug it from your PC. It should shut down and you will see the Nextbase logo.</p>		
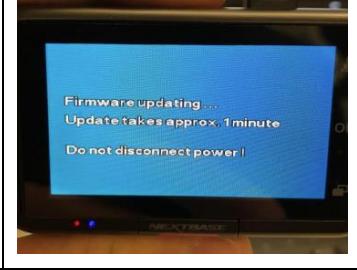
<p>11. After the camera has shut down completely, plug it back into your PC and select 'Power On'. The update will begin automatically.</p>		
<p>12. After the update has installed and your camera has restarted go back into the setup menu (by pressing menu twice) and scroll down to the option that says 'System Info'. The firmware version should appear as R5.8.</p>	